
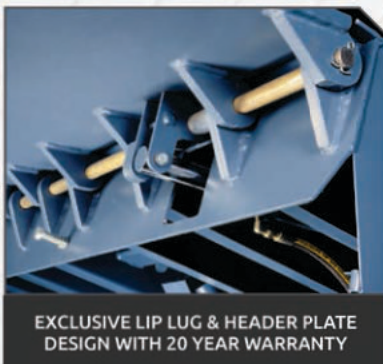


HEAVY-DUTY™ SERIES

NORDOCK®

HYDRAULIC DOCKLEVELERS

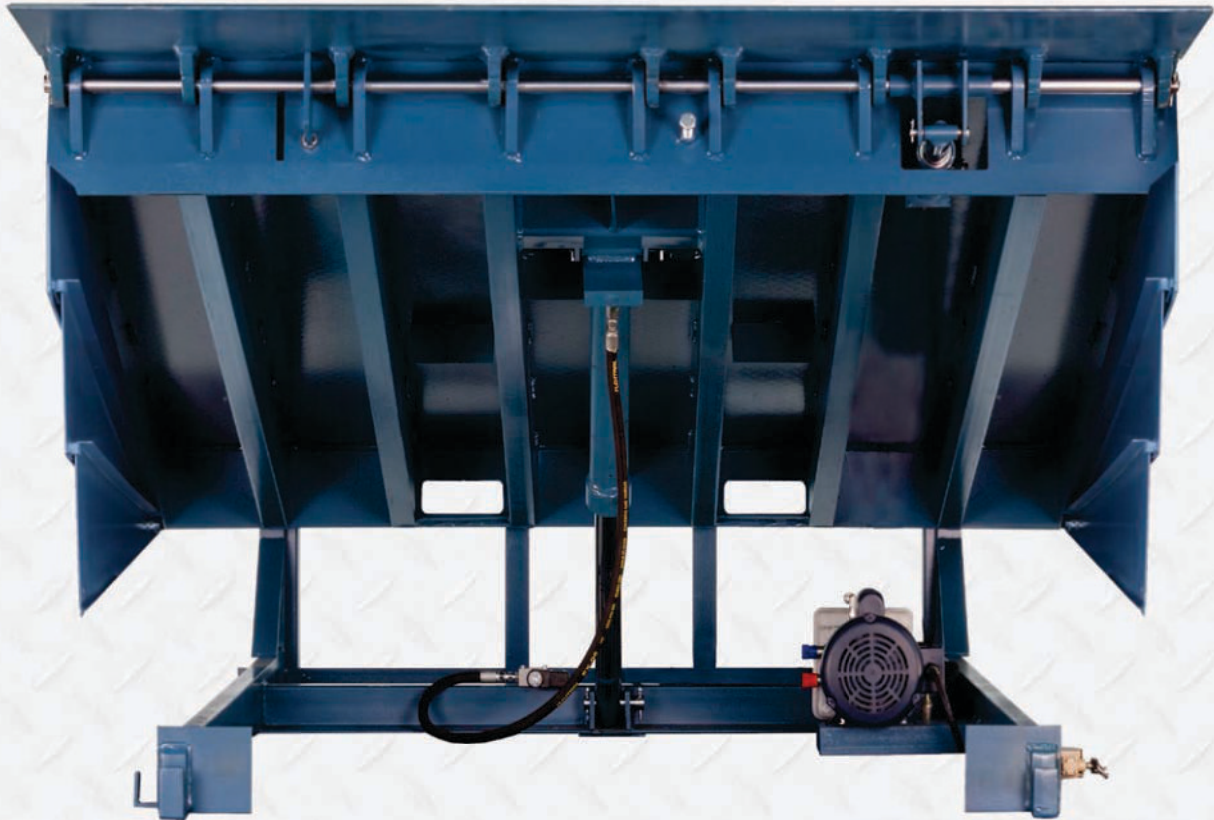

EXCLUSIVE LIP LUG & HEADER PLATE
DESIGN WITH 20 YEAR WARRANTY



SMOOTH TRANSITION CONTINUOUS REAR
HINGE WITH 20 YEAR WARRANTY

FEATURES & BENEFITS

- Patented Self-Cleaning Lip Lug and Header Plate Design with 20-Year Warranty
- Heavy Duty Regenerative Cylinders with Non-Adjustable Velocity Fuse
- Continuous Fixed Rear Hinge Provides Easy Transfer & Eliminates Pinch, Trip or Impact Point
- Six Solid Steel Rear Frame Supports
- Dual Side 33% Beam to Deck Weld Pattern
- Security Night Locks
- Dust Tight Panel Enclosure With Operator Instructions on Cover
- Open Frame Design for Easy Pit Cleaning
- Independent Deck and Lip Maintenance Supports
- Full Operating Range Telescoping Side Guards
- Zinc Coated Deck and Lip Hinge Rods
- Additional Center Deck Support
- High Tensile Lip & Deck Safety Tread Plate
- Two Laminated Dock Bumpers Included

Dedicated People ~ Superior Products

HEAVY-DUTY™ SERIES

NORDOCK®

SPECIFICATIONS

DESCRIPTION

The HEAVY-DUTY™ Series of hydraulic dock levelers provide the ultimate in strength, convenience and reliability with full hydraulic powered deck and lip functions controlled by a single push button.

Available in standard capacity ratings of 25,000 to 50,000 lbs in increments of 5,000 lbs. and standard nominal sizes of 6 feet wide x 6 feet long to 7 feet wide x 10 feet long.

Standard features include full operating range telescoping side guards, fall protection velocity fuse and a comprehensive warranty.

OPERATION

The operator presses the control button until the deck is raised and the lip is fully extended. Releasing the button allows the lip to lower onto the truck bed.

The operator stores the leveler by pressing the control button until the lip fully retracts. The standard 16" long lip projects 11" beyond a 4" bumper to engage a truck bed 12" above or below floor level.

CONSTRUCTION

The platform is a unitized welded structure with continuous welds at the beam, header plate and lugs for maximum strength. The deck plate, lip plate, beam sections and lugs are constructed of minimum 55,000 PSI yield material.

A standard centre deck beam and welded side guards provide additional structural support. The continuous rear hinge provides 4" of side-to-side tilt with no pinch point.

The frame has six solid steel rear supports, an open design for easy pit cleaning, and lip supports that prevent illegal entry when the door is closed. The front and rear hinge rods are SAE 1045 superior shaft, zinc plated and factory coated with anti-seize lubricant.

ELECTRICAL/HYDRAULICS

Frame mounted power unit with 1 HP totally enclosed non-ventilated motor, available in all voltages. NEMA 12 dust tight metal panel enclosure with hinged cover, motor starter and single push button control.

The regenerative hydraulic cylinders are a heavy-duty design with polished chrome rods, guide bearings and high-pressure seals.

The Hydraulic hoses are high-pressure SAE 100R2 with permanent fittings attached.

Consult your Nordock representative for assistance in choosing the correct capacity and options for your application.

MODELS & NOMINAL DIMENSIONS

Model*	Width	Length
NH-66	6'0"	6'0"
NH-68	6'0"	8'0"
NH-610	6'0"	10'0"
NH-6.56	6'6"	6'0"
NH-6.58	6'6"	8'0"
NH-6.510	6'6"	10'0"
NH-76	7'0"	6'0"
NH-78	7'0"	8'0"
NH-710	7'0"	10'0"

* Add capacity required from 25,000 to 50,000 lbs.
Example: NH-68-50.

Longer models & special sizes available to suit existing pits.



SMART-HOOK® & TRUCK-LOCK®
VEHICLE RESTRAINTS



LOGI-SMART™ INTEGRATED
CONTROL PANEL



IMPACT™ SERIES
DOCK BUMPERS



WEARTOUGH®
DOCK SEALS & SHELTERS

OPTIONS & ACCESSORIES

WARRANTIES

20
YEAR

Exclusive Lip
Lug and
Header Plate

5
YEAR

Hydraulic

20
YEAR

Full Width
Rear Hinge

10
YEAR

Structural

ADDITIONAL OPTIONS & ACCESSORIES

- FALL-STOP™ Safety Barrier Gates
- 18" or 20" Long Lip
- Emergency Stop & Lip Extend Control
- Automatic Return to Dock Level
- Brush & ALL-SEAL™ Weather Seal Systems
- Self Forming Pour in Pans & Curb Angle Sets
- Dock Lights

BODE

BodeEquipment.com
(800)797-5699